


Lightweight composite panel having great mechanical performance.  
 It features an excellent durability and high compressive strength.  
 The PVC structural core foam is non-hygroscopic.  
 Outer faces are made of Marine Okoumé Plywood.  
 Panels can be supplied with several surface finishing like veneering by natural or reconstituted wood as well as bonded to HPL sheets.  
 Processing cycle ensure for lower than E1-EN 13986 Formaldehyde Emission.  
 Product entirely manufactured in Italy

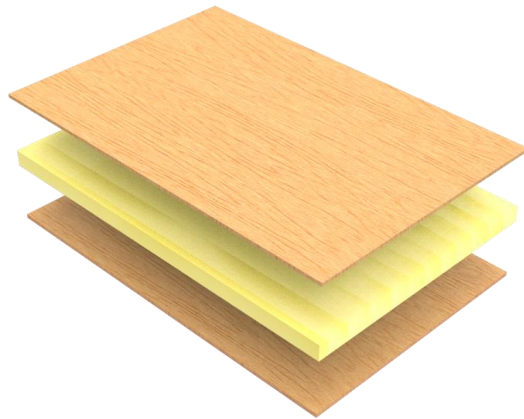


Property	Standard	Unit of Measure	Values				
Nominal Thickness	[]	mm	16	18	21	23	38
Composition	[]	mm	3-10-3	4-10-4	3-15-3	4-15-4	4-30-4
Surface Weight	[]	kg/m <sup>2</sup>	4,0	5,0	4,3	5,3	6,2
Okoumé Plywood Bonding Quality	EN 314-2	Class	3	3	3	3	3
Bending Strength Long-Grain	EN 310	MPa	26	24,7	22,1	20,1	nd
Bending Strength Cross-Grain	EN 310	MPa	24,6	23,6	19,5	19,1	nd
E-Modulus Long-Grain	EN 310	MPa	2740	2660	2280	2260	nd
E-Modulus Cross-Grain	EN 310	MPa	2670	2600	2140	2140	nd
Thermal Transmittance	UNI EN ISO 6946	W/(m <sup>2</sup> ·K)	3,0	2,9	2,1	2,0	1,1
STANDARD SIZES (*)	[]	mm	2480x1200; 3080X1510				

(\*) Special Sizes can be evaluated on demand

## APPLICATIONS

Typical end-use of LARIMAR<sup>®</sup> 60 is the production of Furnishings when weight reduction is highly demanded

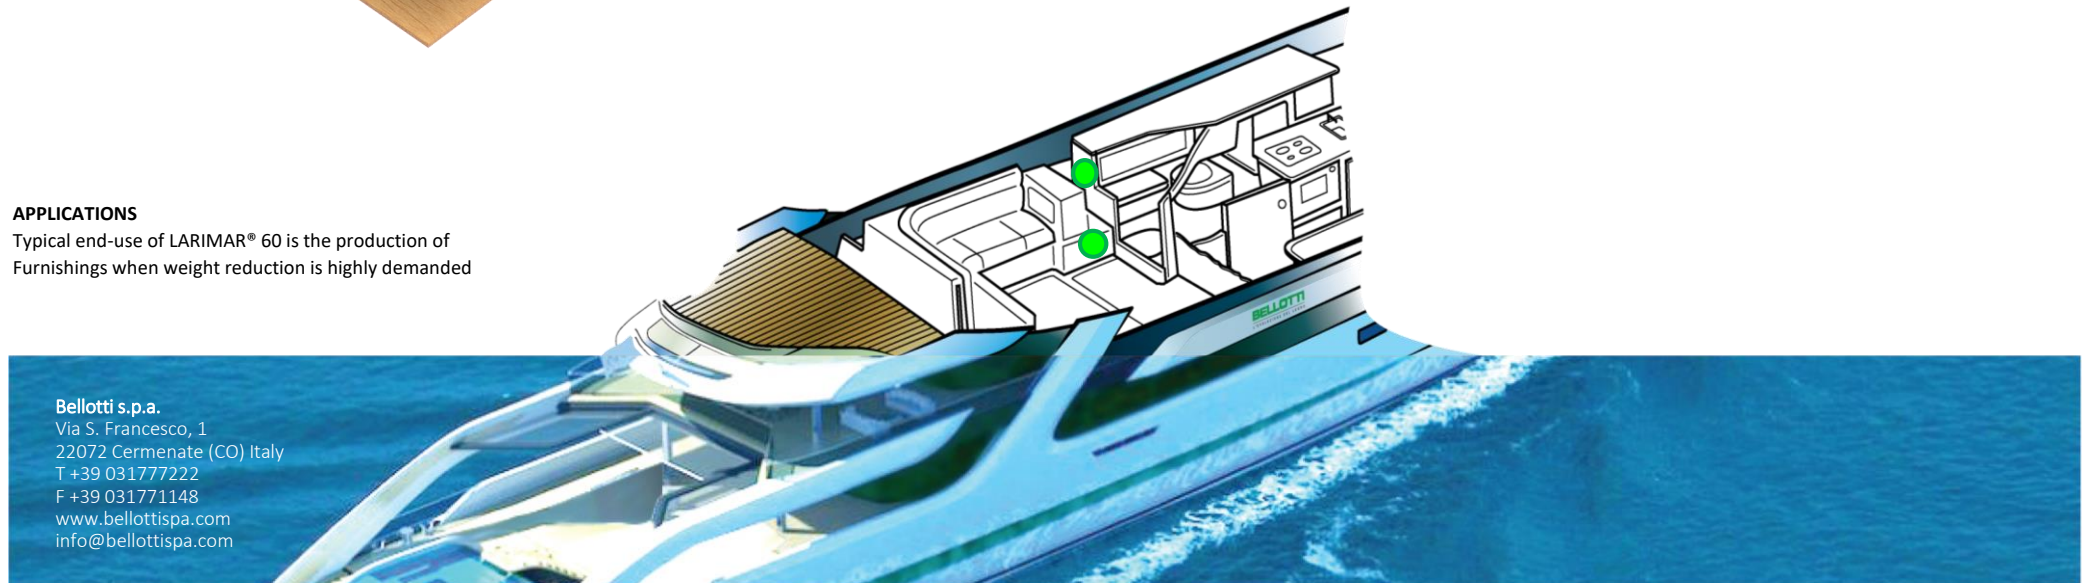

Bellotti s.p.a.  
 Via S. Francesco, 1  
 22072 Cermenate (CO) Italy  
 T +39 031777222  
 F +39 031771148  
[www.bellottispa.com](http://www.bellottispa.com)  
[info@bellottispa.com](mailto:info@bellottispa.com)

Nota: I dati qui sopra riportati sono da considerarsi indicativi e suscettibili di variazioni senza preavviso. E' responsabilità dell'acquirente determinare che i prodotti Bellotti siano idonei alle applicazioni desiderate ed è altresì responsabile del fatto che le modalità di movimentazione, trasporto, deposito ed impiego siano conformi alle indicazioni del fabbricante e alle prescrizioni della normativa vigente.  
 Note: Above data are to be considered for information only and subject to modifications without notice. It is up to purchaser establish that Bellotti Products are suitable to selected application or installation and ensure that ways of handling, transportation ed usage are compliant to Manufacturer's requirements and applicable legislation